


OPTIMUM 212

FINE SEED CLEANER

Designed for high quality fine cleaning of seeds, malting barley, legumes, grains and garden seeds.

The unique air lifting unit makes the Optimum Super 208 ideal for the most challenging separations. The Super fine cleaner includes **shaker feeder, pre-suction and after-suction system, electronic control system, flexible screen flow and air lifting fan.**

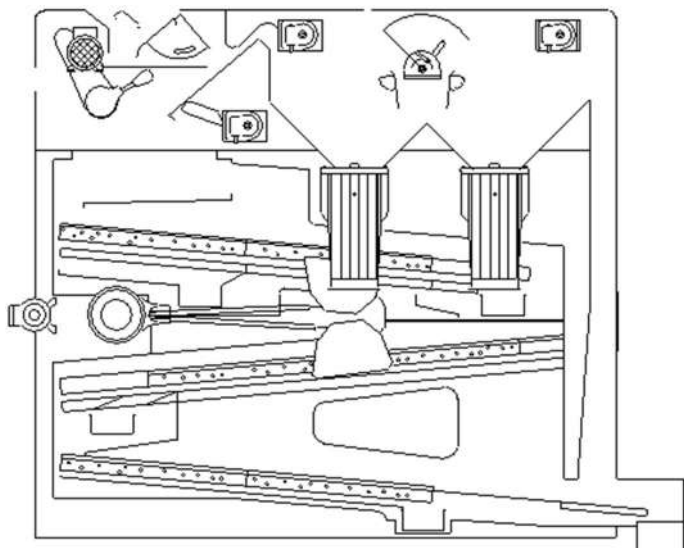

PERFORMANCE

SEEDS	Bulk density t/m ³	Moisture content %	Capacity t/h
Barley	0.68	14	1.75
Clover	0.82	14	1
Coffee, green	0.65	14	2
Maize	0.71	14	1.5-2
Oats	0.51	14	1.5
Peas, common	0.7	14	2
Rapeseed	0.74	7-9	1.5
Rice, paddy	0.51	14	1.5
Rice, white	0.75	14	2
Rye	0.69	14	2.2
Ryegrass	0.3	14	0.4
Sorghum	0.64	14	2.2
Soybeans	0.72	14	2
Sunflower	0.4	7-9	1
Wheat	0.76	14	2.5

Note: Capacities may vary for different impurity and moisture Contents

SCREENS

Screen angle	5.0 Degrees
Screen area, total	3 m ²
Screen size	625×800 mm (6 pcs)

DIMENSIONS

Overall length	3 025 mm
Overall height	2 315 mm
Overall width	1 300 mm

WEIGHT

Weight, empty	1 650 kg
Weight, operating (wheat)	1 690 kg
Weight, choked (wheat)	2 800 kg

OPERATING SPEED

Shaker feeder (shaft)	140–700 rpm
Screens (shaft), fixed speed	280–285 rpm
Screens (shaft), variable speed	260–320 rpm

ELECTRICAL RATINGS

Motor, shaker feeder	0.75 kW
Motor, screens	1,5 kW
Control panel	110–230 V

AIR SUPPLY AND EXTRACTION

Aspiration volume	4 500 m ³ /h
-------------------	-------------------------

DYNAMIC LOADS

Horizontal load "Ph"	±745 N @ 4.6–4.8 Hz
Vertical load "Pv1" (inlet end)	±544 N @ 4.6–4.8 Hz
Vertical load "Pv2" (outlet end)	±544 N @ 4.6–4.8 Hz

Note: Dynamic loads are for normal operation.

NOISE

Sound pressure level, empty	79.3 dB(A)
-----------------------------	------------

COMPLIANCE

EU machinery legislation	Yes
EU ATEX legislation	Option*
EU food contact legislation	Option*

* Consult your **Saat Technologie** dealer for full details.

ENVIRONMENTAL CONDITIONS

Environment	Indoors
Temperature	From -20°C to +40°C
Altitude	Up to 800 m

SURFACE PROTECTION

Frame and enclosure	Paint (corrosivity category C2; low durability)
---------------------	---

LIFETIME

Intended life limit	20 years
---------------------	----------

S A A T
TECHNOLOGE