


# OPTIMUM 225 SCREEN GRADER

Designed for precise grading of grain and seed, its gentle flow of product through the machine ensures an excellent grading precision. The Optimum 225 screen grader include shaker feeder and flexible screen flow.

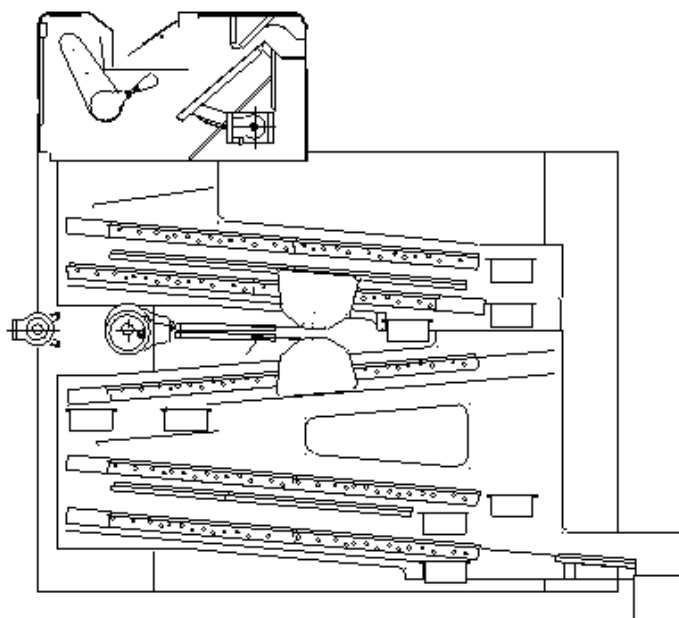

## PERFORMANCE

Materials	Bulk density t/m <sup>3</sup>	Moisture content %	Capacity t/h
Barley	0.68	14	5
Coffee, green	0.65	14	2–3.5
Maize	0.71	14	2–5
Oats	0.51	14	3
Peas, common	0.7	14	3–5
Rice, white	0.75	14	4
Rye	0.69	14	5
Ryegrass	0.3	14	1.6
Sorghum	0.64	14	5
Soybeans	0.72	14	3–5
Sunflower	0.4	9	1.5–2
Wheat	0.76	14	5

Note: Capacities may vary for different impurity and moisture Contents

## SCREENS

Screen angle	5.0 Degrees
Screen area, total	10 m <sup>2</sup>
Screen size	1 250×800 mm (10 pcs)

## DIMENSIONS

Overall length	3 030 mm
Overall height	2 550 mm
Overall width	1 880 mm

## WEIGHT

Weight, empty	2 100 kg
Weight, operating (wheat)	2 200 kg
Weight, choked (wheat)	4 750 kg

## OPERATING SPEED

Shaker feeder (shaft)	140–700 rpm
Screens (shaft), fixed speed	280–285 rpm
Screens (shaft), variable speed	260–320 rpm

## ELECTRICAL RATINGS

Motor, shaker feeder	0.75 kW
Motor, screens	1,5 kW

## AIR SUPPLY AND EXTRACTION

Aspiration volume	100-2500 m <sup>3</sup> /h
-------------------	----------------------------

## DYNAMIC LOADS

Horizontal load "Ph"	±2 515 N @ 4.6–4.8 Hz
Vertical load "Pv1" (inlet end)	±995 N @ 4.6–4.8 Hz
Vertical load "Pv2" (outlet end)	±995 N @ 4.6–4.8 Hz

Note: Dynamic loads are for normal operation.

## NOISE

Sound pressure level, empty	79.3 dB(A)
-----------------------------	------------

## COMPLIANCE

EU machinery legislation	Yes
EU ATEX legislation	Option*
EU food contact legislation	Option*

\* Consult your **Saat Technologie** dealer for full details.

## ENVIRONMENTAL CONDITIONS

Environment	Indoors
Temperature	From -20°C to +40°C
Altitude	Up to 800 m

## SURFACE PROTECTION

Frame and enclosure	Paint (corrosivity category C2; low durability)
---------------------	---

## LIFETIME

Intended life limit	20 years
---------------------	----------